

SafetyCast[™] 300 Virtual Walkway Projector Datasheet



Overview:

The SafetyCast™ 300 Virtual Walkway Projector are the ideal way to display bright floor and wall safety signs in locations where there is high traffic, potential for a hazard, or uneven floors. The SafetyCast™ 300 Virtual Walkway Projector uses an image lens and a high-output LED bulb to project a clear sign at distances of up to 70 m (230′). The SafetyCast™ 300 Virtual Walkway Projector works well in almost all lighting conditions and is easy to mount and adjust. Once installed, there's virtually no maintenance, and you won't need to worry about replacing damaged signs on your floors or walls.

Key Features:

- · Customizable A large variety of safety signages and custom signs.
- · Cost Effective Minimal maintenance eliminates the need for repainting or retaping
- Ultra Visible Powerful close-range and long-range projection, high-contrast image projection
- · Smart Triggered Optional capability to trigger signage using motion sensors, beam break sensors or push button
- · Adjustable Focus

Specifications:

Lamp Details

Type of Light Source: High Performance LED

Rated Power: 300 V

Light Source Life (MTTF): 30,000 hours at 25°C/77°F

Optical

Light Colour Temperature:6,000 KLuminous Flux:30,000 lm

Projection Distance: Up to 45 ft (15 m)

Photometric data:



For details regarding Photometric Data, Projection dimensions, and Visibility Information, please use our Interactive Equipment Estimator at our website,

safety.laserglow.com

Temperature Range (°C): -20 to 50°C (-4 to 122 °F)
Relative humidity: 5% to 80% noncondensing

Projector Power: 300W

Power Supply: 100-240 VAC nominal, 50/60 Hz, 2.5A, 300W

IP Rating: IP65


Standard Warranty: 12 months


Smart Triggered Projection: Projection flashing using either Motion Sensors or Break of Beam sensors


Accessories included: Mounting Bracket, Power supply


SafetyCast[™] 300 Virtual Walkway Projector

Projector and Power Supply Dimensions:

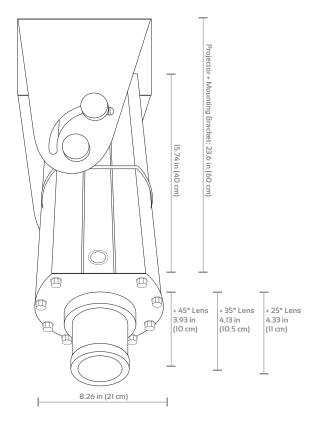

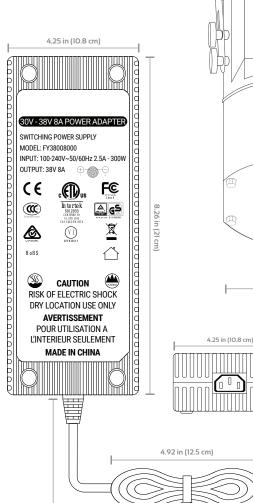

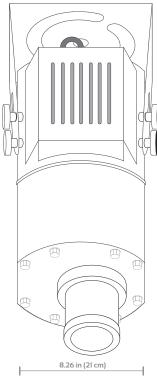



39.37 in (100 cm)

Box Dimensions

Weight

23.6" x 8.26" x 8.26" (60cm x 21cm x 21cm) 17.5 lb

(8 Kg)

Accessories:

The most popular accessories for this model are shown here.

For additional details regarding these or other accessories please see our website or contact us directly.

Product SIKU	Description
ABM088CXX	No Drill Magnetic Mounts
AOO30025T	• Focusing Lens (H = Medium Angle) 300 W
AOO30035T	• Focusing Lens (I = Wide Angle) 300 W

Product	SKU	Description
0	AOO30045T	Focusing Lens (J = Extra Wide Angle) 300 W
To check the Walkway Template list and their availability, visit safety.laserglow.com		



LASERGLOW TECHNOLOGIES

99 Ingram Dr. Unit B, North York, ON, Canada M6M2L7 Tel. (416) 729-7976 Fax (480) 247-4864 sales@laserglow.com www.laserglow.com E&OE: Data included in this sheet may be subject to change without notice. Please confirm critical specifications with our staff prior to ordering.